



PROJECT

CATALOG #

TYPE

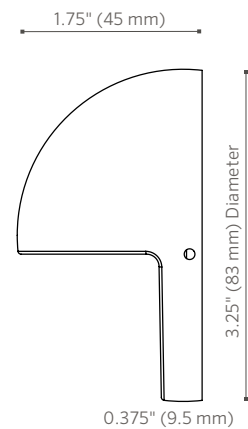
NOTES

MM Wall Light STANDARD PREMIUM

Specify the surface-mounted MM when an integral mount is not practical. The internal parabolic reflector maximizes lighting efficiency while tempered glass diffuser optics soften the beam spread transition.

Quick Facts

- Die-cast aluminum or brass
 - Natural or powder coated brass finishes
 - Two-layer marine-grade anodization and powder coat finish
- Silicone-encapsulated COB LED
 - Compatible with Luxor® technology
 - Phase dimmable
 - Input voltage: 10-15V



MM Wall Light SPECIFICATIONS

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast C360 brass or A380 aluminum faceplate and housing, with stainless steel hardware.

Lamp

G4 lamp base. Preinstalled T3 LED lamp option with G4 base offers a warm 2,700K color temperature with a minimum rated life (L70) 33,000 hours.

Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.

Housing

Die-cast aluminum housing with capacity for one G4 LED.

Faceplate

Die-cast brass or aluminum faceplate.

Lens

Frosted polycarbonate lens with high tolerance for thermal expansion, stress, and abuse.

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Hardware

Two tamper-resistant setscrews included.

Weight

1.1 lbs. (0.5 kg)

Finish

Selection of powder coat, natural brass or antiqued brass finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer. Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions.

Control

Luxor zoning and dimming technology with use of Luxor Cube (LCM-LV). Luxor technology allows up to 250 groups, dimmable in 1% increments between 0 and 100%.

Manufacturing

9001:2015 ISO certified facility

Installation Requirements

Designed for installation on a vertical wall in the downward lighting direction only.

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.











Warranty

10-year limited warranty on fixture; 5-year limited warranty on lamp.

Listings





MM Wall Light ORDERING INFORMATION

Fixture	Lamp	Finish			
MM	LED20W 20W Equivalent LED Lamp, 2,700K	BS Natural Brass		WG White Gloss	
		BZ Bronze Metallic		FW Flat White	
		DG Desert Granite		AL Almond	
		WI Weathered Iron		SV Silver	
		SB Sedona Brown		NP Nickel Plate	
		FB Black			

EXAMPLE FIXTURE CONFIGURATION:
MM-LED20W-FB



LUXOR® TECHNOLOGY OPTIONS: Specify Separately

Cubes	Code	
LOW-VOLTAGE CUBE Supports AC dimmable LEDs and incandescent MAX LOAD: 60W/5A	LCM-LV	
RELAY/0-10V CUBE Supports relay switch MAX LOAD: 250VAC/5A	LCM-RLY-010V	

MoistureBlock is a trademark of DSM&T Co. Inc.

© 2020 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.